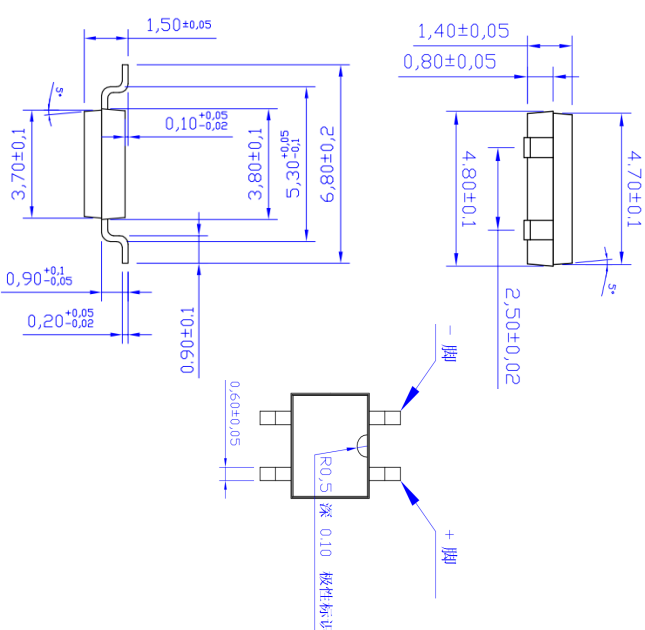


MINIATURE GLASS PASSIVATED SINGLE-PHASE SURFACE MOUNT BRIDGE RECTIFIER

MBF	REVERSE VOLTAGE: 50 to 1000 VOLTS FORWARD CURRENT: 0.5 AMPERE
 <p style="text-align: center;">Dimensions in inches and (millimeters)</p>	<p style="text-align: center;">FEATURES</p> <ul style="list-style-type: none"> · Surge overload rating: 30 amperes peak · Ideal for printed circuit board · Plastic material has Underwriters Laboratory Flammability Classification 94V-0 · Low leakage · Reliable low cost construction utilizing molded <p style="text-align: center;">MECHANICAL DATA</p> <p>Case: Molded plastic, MBF Epoxy: UL 94V-O rate flame retardant Terminals: Leads solderable per MIL-STD-202, method 208 guaranteed Mounting position: Any</p>

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.

		<i>MB05F</i>	<i>MB1F</i>	<i>MB2F</i>	<i>MB4F</i>	<i>MB6F</i>	<i>MB8F</i>	<i>MB10F</i>	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current (see Fig. 1) on glass-epoxy P.C.B (Note 2) on aluminum substrate (Note 3)	I_{AV}	0.5						0.8	Amp
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	30						35	Amp
Maximum Forward Voltage at 0.4A DC and 25 °C	V_F	1.0						Volts	
Maximum Reverse Current at $T_A=25^\circ C$ at Rated DC Blocking Voltage $T_A=125^\circ C$	I_R	5.0						100	uAmp
Typical Junction Capacitance (Note 1)	C_J	13						pF	
Typical Thermal Resistance (Note 3)	$R_{\theta JA}$	60						°C/W	
Typical Thermal Resistance (Note 2)	$R_{\theta JL}$	16						°C/W	
Operating and Storage Temperature Range	T_J, T_{stg}	-55 to +150						°C	

NOTES:

- 1- Measured at 1 MHz and applied reverse voltage of 4.0 VDC.
- 2- On glass epoxy P.C.B. mounted on 0.05 x 0.05" (1.3 x 1.3mm) pads
- 3- On aluminum substrate P.C.B. with an area of 0.8" x 0.8" (20 x 20mm) mounted on 0.05 x 0.05" (1.3 x 1.3mm) solder pad

MINIATURE GLASS PASSIVATED SINGLE-PHASE SURFACE MOUNT BRIDGE RECTIFIER

Characteristic Curves ($T_A=25\text{ }^{\circ}\text{C}$ unless otherwise noted)

Fig.1 Derating Curve For Output Rectified Current

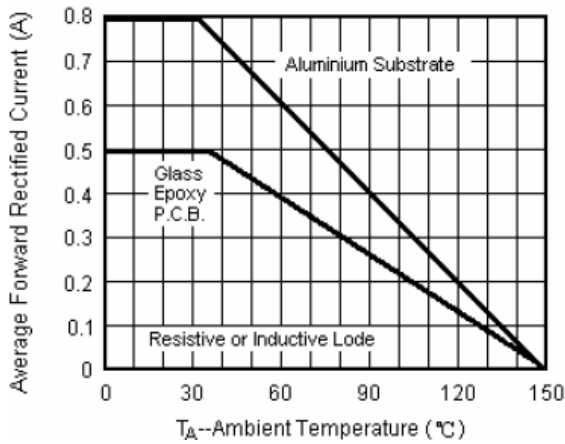


Fig.2 Maximum Non-Repetitive Peak Forward Surge Current Per Leg

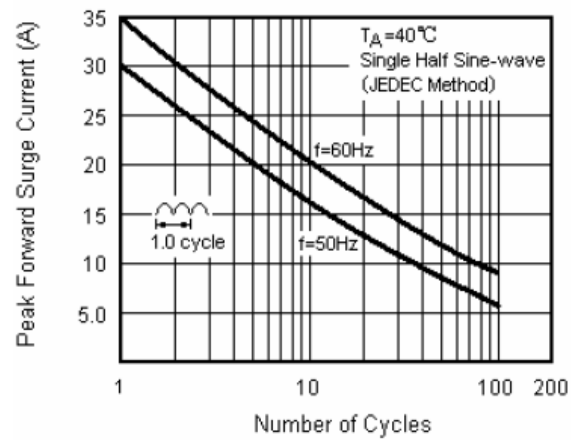


Fig.3 Typical Forward Voltage Characteristics Per Leg

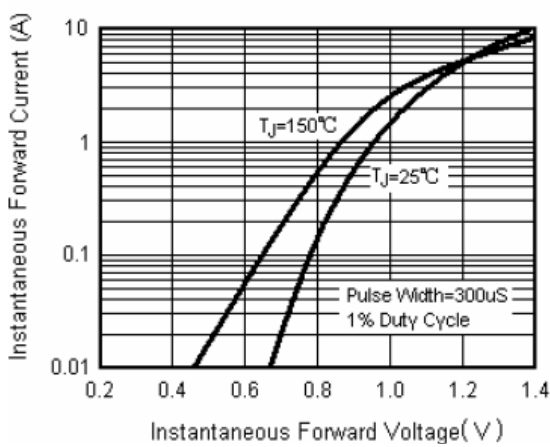


Fig.4 Typical Reverse Leakage Characteristics Per Leg

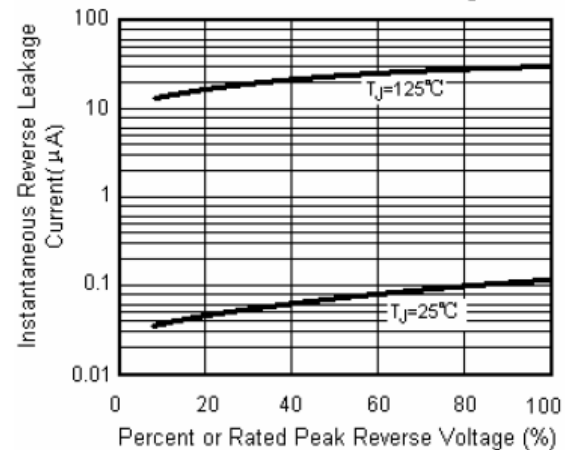


Fig.5 Typical Junction Capacitance Per Leg

